



## RDMX6S™

SKU# RDM620

The RDMX6S™ is an easy-to-use RDM E1.20 compliant 6-way RDM/DMX data splitter featuring a 5pin DMX input, a 5pin DMX loop thru output with built-in termination, and (6) opto-isolated 5pin DMX outputs. Housed in a die-cast aluminum housing, it features a multi-voltage universal auto switching power supply (100-240v), and includes a single unit mounting bracket for truss/clamp installation. Optional single and dual unit rack mount kits are available.



### FEATURES

**RDM E1.20 Compliant**

**5pin DMX Loop Thru Output with Built-In Termination**

**(6) Opto-Isolated 5pin DMX Outputs**

**Die-Cast Aluminum Housing**

**powerCON In**

**Universal Multi-Voltage Auto Switching Power Supply**

**Mounting Bracket for Truss/Clamp Installation Included**

**Optional Single and Dual Unit Rack Mount Kits Available**



Specifications are preliminary and subject to change without notice ©Elation Professional 03/01/16

Elation Professional USA - Corporate Headquarters | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

**PRODUCT SPECIFICATIONS**

**CONTROL / CONNECTIONS**

5pin DMX Input  
 5pin DMX Loop Thru Output with Built-in Termination  
 (6) Opto-Isolated 5pin DMX Outputs  
 powerCON In

**SIZE / WEIGHT**

Length: 6.8" (173mm)  
 Width: 6.7" (170mm)  
 Vertical Height: 2.9" (74mm) (with mounting bracket)  
 Weight: 2.1 lbs. (1.0kg)

**ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz  
 3W Max Power Consumption  
 14°F (-10°C) to 113°F (45°C)

**APPROVALS / RATINGS**



**INCLUDED ACCESSORIES**

- (1) PowerCON Cable
- (1) Clamp Mounting Bracket


**OPTIONAL ACCESSORIES**

ORDER CODE	ITEM
<b>NARROW CLAMP</b>	PRO 2" Wrap Around Style Clamp
<b>RDM100</b>	Single Unit Rack Mount Kit
<b>RDM222</b>	Dual Unit Rack Mount Kit
<b>AC5PDMX5PRO</b>	5 ft. (1.5m) 5pin PRO DMX Cable
	Additional cable lengths available

**TRUSS MOUNTABLE WITH INCLUDED BRACKET**



**DIMENSIONAL DIAGRAMS**

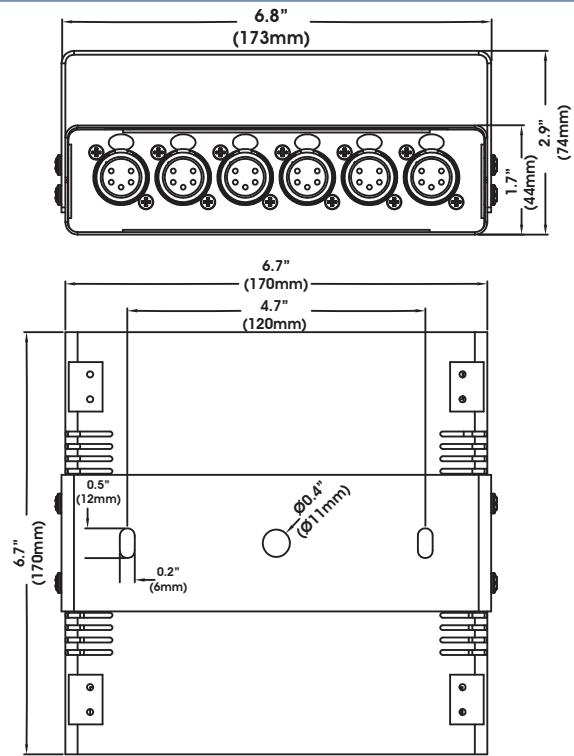

**MOUNTING OPTIONS**

**INCLUDED CLAMP MOUNTING BRACKET**



**OPTIONAL DUAL UNIT RACK MOUNTING KIT**



**OPTIONAL SINGLE UNIT RACK MOUNTING KIT**

