



# Toft Audio Designs® The Legend Continues...

MALCOLM TOFT INNOVATIVE DESIGNS



## ATB Series™ Console


- Available in 16, 24 & 32 channel configurations
- 8 Sub-Groups plus Master Left/Right Outputs
- Direct Outputs for every channel
- Inline Monitoring for every input channel
- 8 additional Monitor Returns in Master/Group Section
- Heritage equalisation for every input
- 6 Auxiliary Sends (Aux 1 - pre fader, Aux 2-6 - selectable pre or post Fader)
- 8 dedicated stereo Auxiliary Returns
- Accurate 12 Stage LED Metering (plus VU's for Master Outputs)
- Up to 88 channels on mixdown (32 channel version)
- Optional 24Bit/192k Firewire Bridge

**Preliminary Information**


Features, appearance, and specifications subject to change without notice

# Input Strip


# Group/Master Section

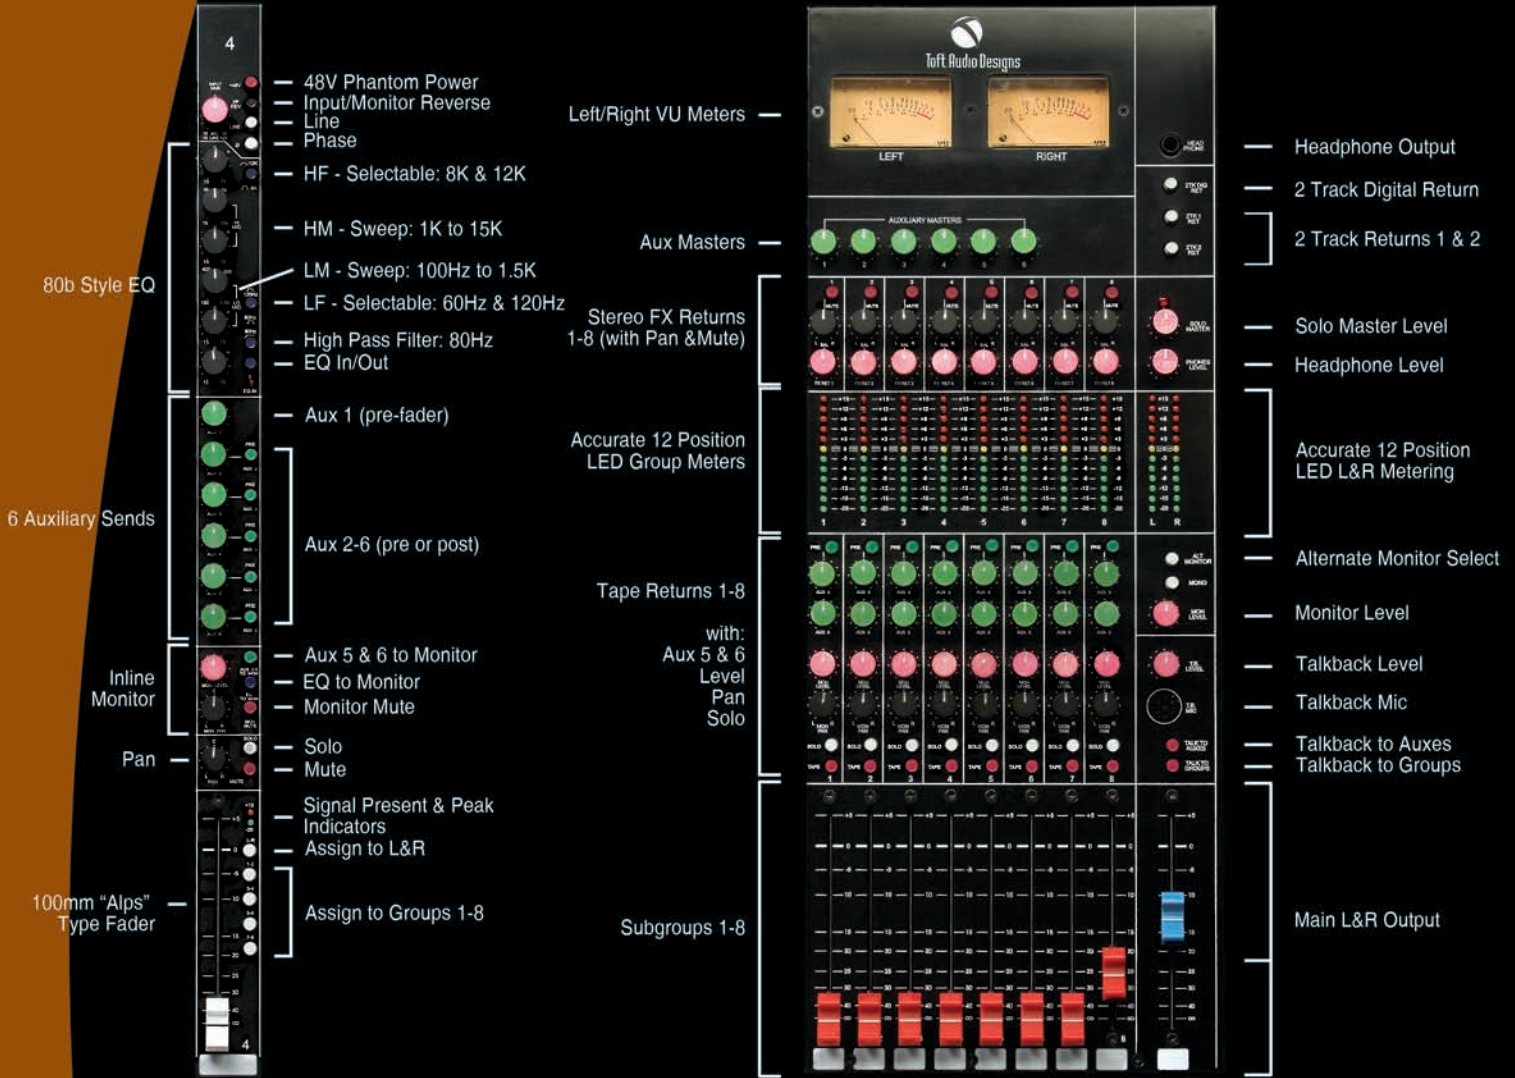

# Input Panel

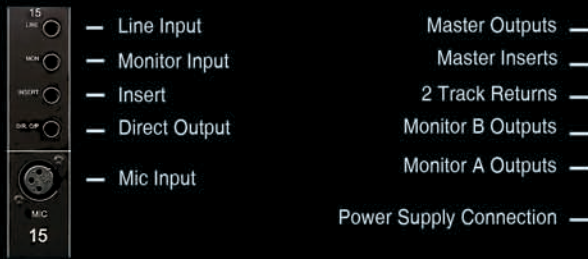

# Group/Master Panel

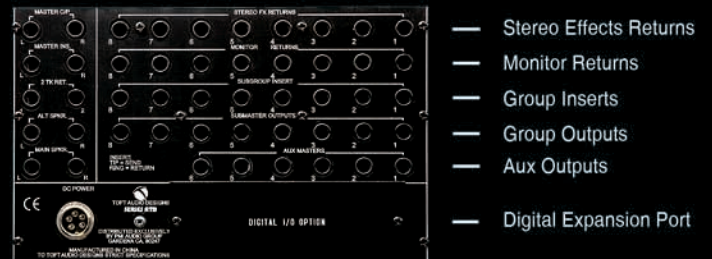

## TECHNICAL SPECIFICATIONS\*

### Input Impedance

- Microphone: >1.2K-ohm balanced
- Line: >15K ohm electronically balanced

### Output Impedance

- <100ohm

### Gain

- Microphone: 60dB
- Line: -15 to +25dB

### Noise

- Microphone: <-128dBu ref 150 ohm (20Hz-20kHz)
- Line: <-75dBu (Eq. In, 20Hz-20kHz)

### Maximum Levels

- Mic Input: > +20dBu at all frequencies
- Line Input: > +24dBu at all frequencies