

# LINE ARRAY SERIES


# LA4

GALAXY AUDIO

16 ohm  
Unpowered  
Pole Mount

## LINE ARRAY SERIES LA4

The LA4 is an unpowered passive 16 ohm Line Array speaker. The back panel features two combination input jacks that will accept either a 4 pole Speakon™ (twist lock) or 1/4" plug. These two input jacks are wired in parallel to provide a convenient way to daisy chain multiple speakers to a single amplifier channel. The LA4 features a pole mount socket on the bottom of the cabinet that fits a standard 1-3/8" speaker stand. This makes the LA4 a good choice for portable PA applications or for permanent mounting with certain wall mount brackets that employ the socket.

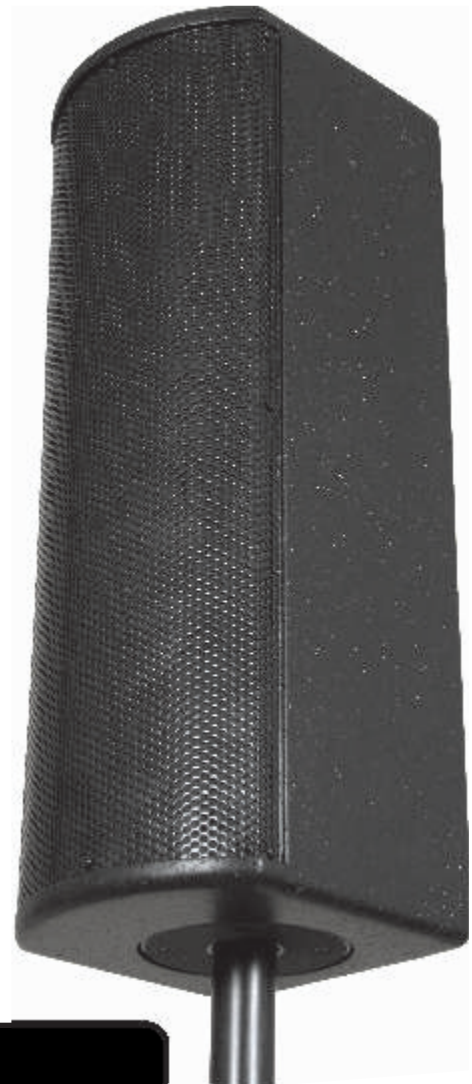

**GREAT MID/HIGH  
BOX FOR ANY LIVE  
SOUND APPLICATION**

Also available  
with mounting points  
as shown to left

# LINE ARRAY SERIES

# LA4

**GALAXY AUDIO**

**16 ohm  
Unpowered  
Pole Mount**

## SPECIFICATIONS

- Frequency response:** 150 Hz –18 kHz
- Power handling capacity:** 125 Watts
- Sensitivity:** (1 watt @ 1Meter) 98 dB (1 kHz octave band)
- Maximum SPL:** (125 watts @ .5 meter): 126 dB
- Speaker complement:** Four 4.5-inch full range drivers
- Nominal impedance:** 16 ohms
- Input connection:** Two Speakon®/ ¼ -inch combinations jacks wired in parallel
- Enclosure Materials:** 15mm plywood, metal mesh grille
- Color:** Black or White
- Features:** Integrated Handle and 1-3/8" Pole Mount Socket
- Dimensions:** 21.5-inches x 7.5-inches x 8.5-inches  
(546 mm x 191 mm x 215 mm)
- Net weight:** 14.1 lbs. (6.39 kg)
- Shipping weight:** lbs. ( kg)



**GALAXY AUDIO**

MAKERS OF THE ORIGINAL HOT SPOT PERSONAL MONITOR

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 [www.galaxyaudio.com](http://www.galaxyaudio.com)

Distributed outside the United States by **E and E Exports, Inc.** 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614  
562.988.3447 FAX 562.989.3037

Distributed in Canada by **Audio Distributors International (ADI)** 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada  
450.449.8177 FAX 450.449.8180

Specifications subject to change without notice.