

EAWJF100 Loudspeaker shown




Renkus Heinz TRC81 Loudspeaker Shown



Truss and beam clamp ready



Tripod stand ready

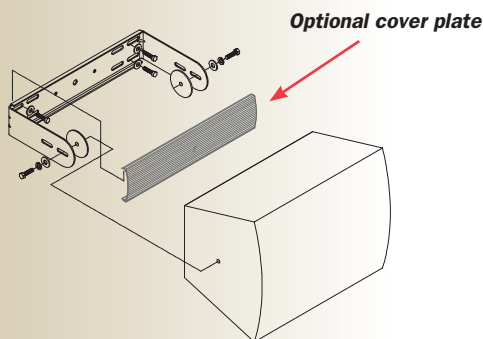

U-Series

Fixed Width Speaker Mount

These speaker mounts install and aim loudspeakers from walls, ceilings, under balconies, overhangs and other structural surfaces. Loudspeakers rotate on one axis to acquire the tilt angle desired and then locks it into position. Flexible features allow the mount to be installed under trussing with beam clamps, atop tripod stands or suspended from threaded rod, all without drilling holes. American standard hardware and sound isolation gaskets are included, and metric hardware is available separately.

For anchoring into wall studs, mounting holes are offset in the brackets' base and placed on 12", 16" and 20" centers, depending on the width of the mount. Side arm slots increase the bracket's range of installation positions and sound isolation gaskets are included to isolate sound between the wall (or ceiling) and the speaker. These gaskets also protect the speakers' finish.

Snap-On Cover Plate *(optional)*

The U-Bracket Cover Plate is a cosmetic snap-on cover that hides the wires and fasteners associated with speaker installations. A hole can be drilled through the cover plate to deliver the signal wire close to the speaker's terminal block for the cleanest installation. (*See table on back.*)

SPECIFICATIONS:

Material:	Structural steel alloy
Finish:	Powder coat
Color:	Black
Working load:	See table on back
Design factor:	10:1 ratio
Pack count:	2/carton

OPTIONAL ACCESSORIES:

- Snap On Cover Plate (Available in black and white)
- Metric bolt kit (for M6, **2-1420** for M8, **2-1430** and for M10, **2-1440**)
- Safety Cable Kit (Standard length of 12,16, 25,40,80,154 and 180 inches)
- Truss clamps for 2" diameter truss bars
- Beam clamps, up to 16" wide beam flanges
- Tripod adapters standard 5" hole patterns
- Threaded rod, 1/4"-1/2" diameter up to 12'-0" in length
- PoleStar® adapts speaker mount to poles and columns



A division of:
ADAPTIVE TECHNOLOGIES GROUP
 1635 E. Burnett Street
 Signal Hill, CA 90755 USA
 PH: 562.424.1100 FX: 562.424.3520

www.allenproducts.com


U-Series

Fixed Width Speaker Mount

DIMENSIONS: INCHES / METRIC

Product	Cover Plate Model #:	A	B	C	D	E	F	G	Shipping Weight/Pair	Working Load Limit
2-0450		13.25/337	5.35/135	4.25/108	2.25/57	2.0/51		Holes	3 lbs	25 lbs
2-0500		8.75/222	6.0/152	5.50/140	3.5/89	2.0/51		Holes	3 lbs	25 lbs
2-0550		10.25/260	5.86/149	4.75/121	2.75/70	2.0/51		Holes	3 lbs	25 lbs
2-0600 *	CP-0600	11.25/286	8.50/216	7.0/178	5.0/127	3.5/89	.50/13	Holes	7 lbs	60 lbs
2-0650		12.25/311	9.0/229	7.5/190	5.5/140	3.0/76		Holes	7 lbs	60 lbs
2-0700		14.25/362	10.0/254	8.5/216	6.5/165	3.0/76		Holes	8 lbs	60 lbs
2-0750 *	CP-0750	15.0/381	11.5/292	10.0/254	8.0/203	3.5/89	.50/13	Holes	9 lbs	60 lbs
2-0800		15.75/400	11.0/279	9.5/241	7.5/190	3.0/76		Holes	9 lbs	60 lbs
2-0850		16.25/413	10.5/267	9/229	7.0/178	3.0/76		Holes	9 lbs	60 lbs
2-0860 *		15.75/400	8.00/203	6.50/165	4.50/114	3.00/76		Holes	6 lbs	25 lbs
2-0880 *		16.5/419	16.9/429	15.38/391	13.9/340	4.3/108	.50/13	Slots	18 lbs	60 lbs
2-0900 *	CP-0900	17.0/432	8.48/215	6.98/177	4.98/126	3.5/89	.50/13	Slots	9 lbs	60 lbs
2-0950 *	CP-0950	17.75/451	13.0/330	11.5/292	9.5/241	3.5/89	.50/13	Holes	13 lbs	60 lbs
2-0980 *	CP-0980	18.5/470	9.5/241	8.0/203	6.0/152	3.5/89	.50/13	Holes	13 lbs	60 lbs
2-1000 *	CP-1000	19.25/489	9.0/229	7.5/190	5.5/140	3.5/89	.50/13	Slots	14 lbs	60 lbs
2-1050 *	CP-1050	20.25/514	8.5/216	7.0/178	5.0/127	3.5/89	.50/13	Holes	10 lbs	60 lbs
2-1060 *	CP-1060	23.25/591	11.5/292	10/254	8.0/203	3.5/89	.50/13	Holes	12 lbs	60 lbs
2-1100 *	CP-1100	24.06/611	14.5/368	13/330	11.0/279	3.5/89	.50/13	Holes	15 lbs	60 lbs
2-1150 *	CP-1150	21.5/546	9.5/241	8.0/203	6.0/152	3.5/89	.50/13	Holes	12 lbs	60 lbs
2-1200 *	CP-1200	30.64/778	10.2/260	8.75/222	6.75/172	3.5/89	.50/13	Holes	16 lbs	60 lbs
2-1230 *	CP-1230	28.75/730	8.0/203	6.5/165	4.5/114	3.5/89	.50/13	Holes	15 lbs	60 lbs
2-1250		30.25/762	13.2/335	10.7/272	N/A	8.5/203	.75/13	Slots	45 lbs	150 lbs
2-1260		31.00/787	17.2/437	14.7/373	N/A	8.5/204	.75/19	Slots	45 lbs	150 lbs
2-1290 *	CP-1290	44.5/1118	6.5/165	5.0/127	3.0/76	3.5/89	.50/13	Holes	17 lbs	60 lbs
2-1300 *	CP-1300	25.13/638	10.5/267	9.0/229	7.0/178	3.5/89	.50/13	Holes	14 lbs	60 lbs
2-1320 *	CP-1320	26.5/673	6.5/165	5.0/127	3.0/76	3.5/89	.50/13	Holes	11 lbs	60 lbs

* Polestar mountable

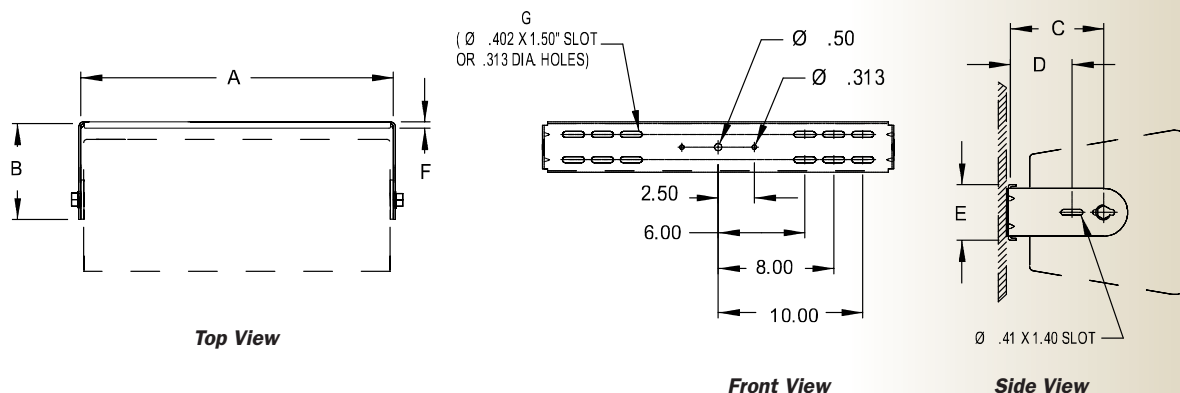

A division of:
ADAPTIVE TECHNOLOGIES GROUP
 1635 E. Burnett Street
 Signal Hill, CA 90755 USA
 PH: 562.424.1100 FX: 562.424.3520

www.allenproducts.com

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.



MADE IN THE USA

ALWAYS USE SAFETY CABLES.