Go Getter Sound System

Technical Specifications




SIX YEAR WARRANTY

The Go Getter is perfect for voice projection in an indoor or outdoor setting, and for playing music during school activities. The unit delivers 109dB of intelligible speech, and is designed for users with little-to-no technical background.

Featuring a guick set-up and easy-to-use controls, the new Go Getter is a truly versatile sound system with true AC/DC operation, and improved battery life. The system is ideal for schools, corporate training, and places of worship.



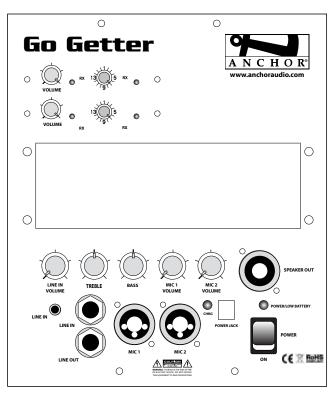

(Back Panel)

Features

Reach Crowds of 500+

True AC/DC - 110/220V Power Supply

Peak Wattage 75W AC / 50W DC

Single or Dual UHF Wireless with 16 User Selectable Channels

Optional MP3/CD Player Combo

LED Displays Charging and Low Battery

Two Microphone Combo Input Jacks

6.5" Woven Fiber Woofer & High-Output Horn Tweeter

Lightweight at just 23 Pounds

Improved "Limiter" Circuitry Reduces Distortion & Increases Intelligibility

Durable Injection-Molded Polypropylene Case

External Speaker Output Powers Optional Companion Speaker

GO GETTER MODELS

GG	AC/DC powered sound system
GG-U1	One wireless receiver
GG-U2	Two wireless receivers
GG-C	Built-in MP3/CD Player
GG-CU1	MP3/CD player & built-in wireless receiver
GG-CU2	MP3/CD player & two built-in wireless receiver
GG-01	Unpowered companion speaker

UHF WIRELESS

Wireless handheld microphone/ WH-6000 transmitter

WB-6000 Wireless body-pack transmitter (requires handsfree microphone) Microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F TECHNICAL SPECIFICATIONS

Rated Power Output 75 watts AC/DC mode Max SPL @ Rated Power 109dB @ 1 meter 60 Hz - 16 kHz Frequency Response AC Power Regs. 90 - 264 VAC, 50/60 Hz 18" x 11" x 9" (46 x 28 x 23 cm) Dimensions (HWD) Weight (AC/DC)

23 lbs/ 10.4 Kg

Inputs

Microphone (Two combo) Lo-Z (1 $K\Omega$), balanced, XLR

12 VDC condenser microphone

phantom power

Hi-Z (10 K Ω), balanced 1/4'' phone

Auxiliary (line) Outputs

Line (post fader)

Hi-Z (10 K Ω), balanced 1/4'' phone

Lo-Z, buffered, 1/4"unbalanced/ balanced

Speaker Out 4-pole Neutrik Speakon® jack



Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

(Features & Specifications Subject to Change Without Notice)

800.262.4671