



PLATINUM SBX PRO™ PRELIMINARY SPECIFICATIONS

The new Platinum SBX PRO™ is an innovative full featured patent pending design 3-in-1 illuminare which can be utilized as a beam, spot, or wash fixture, featuring the brand new Phillips™ MSD Platinum 17 RA 350W, 6,900K, 85CRI lamp, 15,000 total lumens delivering comparable output to 700W fixtures, 0° to 15° zoom in beam mode and 5° to 40° zoom in spot mode, 13 dichroic colors including UV, CTO, CTB, plus white (open), 9 rotating interchangeable and 14 fixed gobos, beam shaper and rotating 8-facet prisms, frost filter, an internal EWDMX wireless DMX receiver, 3 and 5 pin DMX in/out and powerCON connections, (6) button control full color 180° reversible menu display, 500W max power consumption, and a multi-voltage universal auto switching power supply (100-240v).



FEATURES

Patent Pending Beam, Spot, and Wash 3-in-1 Illuminare

New Phillips™ MSD Platinum 17 RA 350W Lamp

15,000 Total Lumens, 6,900K, 85CRI, 1,500 Hours

Comparable Output To 700W Fixtures With No LUX Loss

Beam Mode 0-15° / 150,000 LUX 13,935 FC @66' (20m)

Spot Mode 5-40° / 12,000 LUX 1,115 FC @30' (9m)

13 Dichroic Colors Including UV, CTO, CTB, + White

9 Rotating Interchangeable and 14 Fixed Gobos

Beam Shaper and Rotating 8-Facet Prisms, + Frost Filter

Internal EWDMX Wireless DMX Receiver



ELATION | PLATINUM SBX PRO™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

Patent Pending 3-in-1 Beam, Spot, and Wash Illuminare
 Comparable Output To 700W Fixtures With NO LUX Loss
 0° - 15° Beam and 5° - 40° Spot Zoom
 CTO & CTB Color Correction
 Beam Shaper and Rotating 8-Facet Prisms
 Internal EWDMX Wireless DMX Receiver

SOURCE

Phillips™ MSD Platinum 17 RA 350W Lamp
 1,500 Hour Average Lamp Life

PHOTOMETRIC DATA

15,000 Total Lumens, 6,900K, 85CRI
 150,000 LUX 13,935 FC @66' (20m) (0° Beam Full ON)
 12,000 LUX 1,115 fc @30' (9m) (5° Spot Full ON)

EFFECTS

Beam Shaping and 8-Facet Prism and 16 Prism Macros
 Frost Filter
 Iris: 5% - 100%
 Strobe: 1-18fps
 Dimming: 0% - 100%

COLOR

13 Dichroic Colors Including UV, CTB, CTO, + White

GOBOS

2 Gobo Wheels
 9 Interchangeable / Rotating / Indexing Gobos
 Gobo Size: pending
 14 Fixed / Indexing Gobos

CONTROL / CONNECTIONS

(3) DMX Channel Modes (18/20/28)
 RDM (Remote Device Management)
 6 Button Touch Control Panel
 Full Color 180° Reversible LCD Menu Display
 8 / 16 Bit Resolution Adjustable Movement
 Internal EWDMX Wireless DMX Receiver
 3pin & 5pin DMX In/Out
 powerCON Power In

SIZE / WEIGHT

Length: 17.2" (438mm)
 Width: 13.2" (335mm)
 Vertical Height: 26.6" (675mm)
 Weight: 62.0 lbs. (28 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 500W Max Power Consumption
 -13°F to 113°F (-25°C to 45°C)

APPROVALS / RATINGS

CE Pending
 cETLus Pending
 RoHs Compliant

INSTALLATION

Rigging: Clamps (Not Included)
 Working Position: Flat Surface / Inverted (180°)

INCLUDED ITEMS

Omega Brackets
 3pin DMX Cable
 Safety Cable
 powerCON Cable

PHOTOMETRIC DATA



BEAM MODE


	m	ft
Distance	20	65.6
	lux	fc
Full ON	150,000	13,935



SPOT MODE

	m	ft
Distance	9	29.5
	lux	fc
Full ON	12,000	1,115

DIMENSIONAL DIAGRAMS

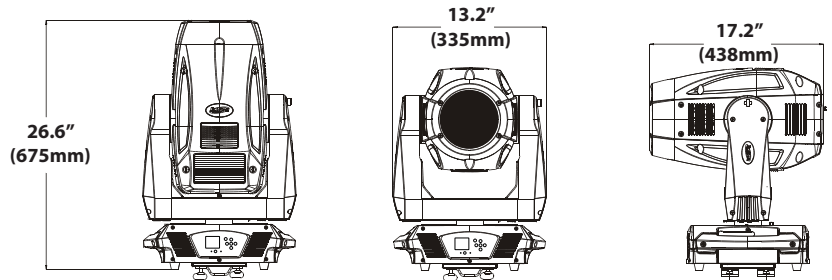

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
** pending **	Road Case For Platinum SBX™
ELO211	Eloader II™ Software Updater Box
EWDMXSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
EWDMXT	Wireless DMX Transmitter
EWDMXR	Wireless DMX Receiver
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC3PDMX10PRO	10 ft. (3m) 3pin PRO DMX Cable
AC3PDMX15PRO	15 ft. (4.5m) 3pin PRO DMX Cable
AC3PDMX25PRO	25 ft. (7.5m) 3pin PRO DMX Cable
AC3PDMX50PRO	50 ft. (15.2m) 3pin PRO DMX Cable
AC5PDMX10PRO	10 ft. (3m) 5pin PRO DMX Cable
AC5PDMX15PRO	15 ft. (4.5m) 5pin PRO DMX Cable
AC5PDMX25PRO	25 ft. (7.5m) 5pin PRO DMX Cable



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu