Super Narrow Bezel LG Video Wall

▶ 55LV35A-5B

55" class (54.64" diagonal)

▶ 47LV35A-5B

47" class (46.96" diagonal)



Display

SUPER NARROW BEZEL


With a bezel-to-bezel measurement of just 4.9mm (47') and 3.5mm (55") our LV35 series video walls create a stunning visual canvas that is easily installed.



55LV35A, 47LV35A

HIGH BRIGHTNESS UNIFORMITY

80% Brightness uniformity ensures that a high-quality image is delivered across all displays.



WIDE VIEWING ANGLE

IPS accurately displays an image's quality and color at a 178° ultra wide viewing angle.



IPS HIGH RELIABILITY

LG's IPS Premium Displays present crystal clear images in both landscape and portrait orientations without hot spots until screen surface temperature rises above 230°F.



Software

SUPERSIGN

- Video walls are easily configured using included templates
- Rotate, cut and edit content in desired layout
- Content can be scheduled based on time and day
- Ability to distribute content to media players



SuperSign V Editor



SuperSign V

SUPERSIGN ADVANCED COLOR ADJUSTMENT

The intuitive GUI in SuperSign C software allows simple measurement and adjustment of display settings instantly. White balancing of a video-wall display is automatic using a sensor.



SuperSign C

REMOTELY MONITOR & CONTROL

Intuitive GUI-based Remote Monitoring & Control via the network and RS232 connection.



SuperSign C



Super Narrow Bezel LG Video Wall

Rear Jack Panel


LGsolutions.com

▶ 55LV35A-5B

55" class (54.64" diagonal)

▶ 47LV35A-5B

47" class (46.96" diagonal)

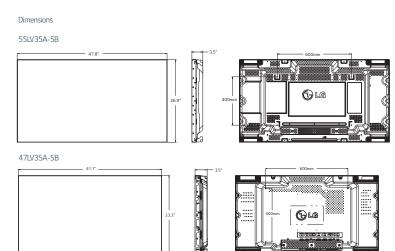

RS-232CIN	RS-232C OUT	USB	Niman	DVIIN	DVIOUT	RGB / AV /COMPONENT IN	IRIN	LAN
		الشاا						무무

PANEL	Model	55LV35A-5B	47LV35A-5B		
	Panel Size	55" class (54.64" diagonal)	47" class (46.96" diagonal)		
	Panel Type	IPS			
	Aspect Ratio	16:9			
	Native Resolution	1920 x 1080 (FHD)			
	Brightness	500 cd/m ²	450 cd/m ²		
	Contrast Ratio (Typ.)	1,400:1	1,200:1		
	Dynamic CR (DCR)	500,0	500,000:1		
	Viewing Angle	178°/178°			
	Response Time	12ms (G to G)	12ms (G to G)		
	Surface Treatment	Haze 10%	Haze 1%		
	Orientation	Portrait & Landscape			
SIGNAL (INPUT)	Digital	DVI-D (1), HDMI (1) with HDCP for all input			
	Analog	RGB (1), Component (RGB Shared), AV (RGB Shared)			
	External Control	RS232C (1), RJ45 (1), IR Receiver (1)			
	USB	USB 2.0 (1)			
SIGNAL (OUTPUT)	Digital	DVI-D (1)			
	External Control	RS232C (1)			


CABINET	Model	55LV35A-5B	47LV35A-5B		
	Color	Black			
	Bezel Width	2.25mm (left/top) / 1.25mm (right/bottom) 3.2mm (left/top) / 1.7mm (right/bottom)			
	Monitor Dimensions (W x H x D)	47.8" x 26.9" x 3.5"	41.1" x 23.2" x 3.5"		
	Weight (head)	50.7 lbs	36.4 lbs		
	Carton Dimensions (W x H x D)	53.3" x 33.5" x 8.7"	46.5" x 30.3" x 6.5"		
	Packed Weight	66.1lbs	47.4 lbs		
	Handle	Yes			
	VESA™ Standard Mount Interface	600mm x 400mm			
SPECIAL	Temperature Sensor	Yes			
FEATURES	Tile Mode	Yes, Up to 15 x 15 (Natural mode)			
	Source Selection	Digital (HDMI / DVI) / Analog (RGB) / Component / USB			
	Brightness/Contrast/ Backlight		Yes		
	Position/Size	Yes			
	Auto Config/Phase	Yes			
	ISM Method	Normal, Color Wash			
	Input Label Yes				
	Auto Power/Source Memory	Yes			
	DPM Select	Yes (Installation Menu)			
	Energy Saving Yes, Off / Minimum / Medium / Maximum / Screen Off				
	Smart Energy Saving Yes				
ENVIRONMENT CONDITIONS	Operation Temperature	peration 0°C~40°C emperature			
	Operation Humidity	10%~80%	10%~90%		
POWER	Power Supply	100-240V~, 50/60Hz			
	Power Type Built-in Power				
	Power Consumption				
	Normal On (Typ.)	160W	130W		
	Power Save/Sleep Mode (Max)	90W	85W		
	DPM	0.7W			
	Power Off	0.5W			
STANDARD CERTIFICATIONS	Safety	UL / cUL / CE	UL / cUL / CB / TUV / KC		
CERTIFICATIONS	EMC	FCC Class "B	" / CE / KCC		
	ErP / Energy Star	Yes / Yes(Energy Star 6.0)			
WARRANTY	3-Year Limited Warranty (Parts/Labor/Backlight)				
UPC		7 19192 19537 0	7 19192 19484 7		
MEDIA PLAYER COMPATIBILITY	External Media Player Attachable Yes				
SOFTWARE COMPATIBILITY	SuperSign Elite-w lite	Yes			
	SuperSign Elite-c	Yes*			
ACCESSORIES	Remote Controller, Power cable, DVI Cable, Manual, IR Receiver, RS-232C Cable, Guide Bracket, Screw				

^{*} SuperSign software is available at http://www.lg.com/us/commercial/video-walls



Customer Service: 888.865.3026 www.LGsolutions.com/support
















@ Copyright 2014 LG Electronics USA, Inc. All Rights Reserved. "LG Life's Good" is a registered trademark of LG Corp.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency. In Plane Switching is a trademark of LG Philips LCD Ltd. VESA is a trademark of Video Electronics Standards Association. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

All other product and brand names are trademarks or registered trademarks of their respective companies.

