



Electro-Voice SX80 Loudspeaker shown

MultiMount™

Pan and Tilt Speaker Mount


The MultiMount-016 quickly mounts and aims loudspeakers weighing up to 20 lbs./9 kg. to walls, from ceilings, overhangs and other structural surfaces. Three separate rotational axes make aiming fast, versatile and permanent.

The MultiMount's unique support arm acts as a convenient carrying handle to help lift the speaker into place. Once inserted, the wall plate supports the weight of the loudspeaker for hands free wiring and aiming.

MultiMounts are built from tough alloy metals to assure reliable permanent installations. Black and white paint finishes are available, packaged two per carton along with a variety of assembly hardware. Factory made safety cables are also available separately.



MultiMount-016 fits standard 2.00" x 4.25" and 2.75" x 5.00" mounting patterns:

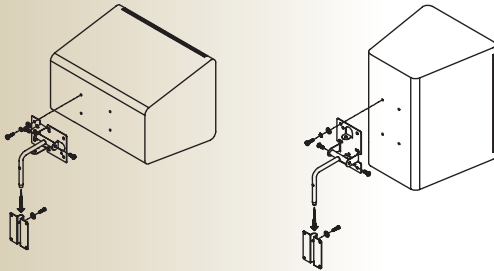

Horizontal Orientation

Vertical Orientation


SPECIFICATIONS:

- Material:** Steel alloy
- Finish:** Powder coat
- Color:** Black or white
- Working load limit:** 20 lbs. (9 kg)
- Design factor:** 10:1 ratio
- Net weight:** 1.5 lbs (.7 Kg) each
- Shipping weight:** 4 lbs (1.8 Kg) per pair
- Pack count:** 2 units/carton

OPTIONAL ACCESSORIES:

- PoleStar™ pole adapter
- Safety cables (many standard lengths)

VERTICAL ORIENTATION:

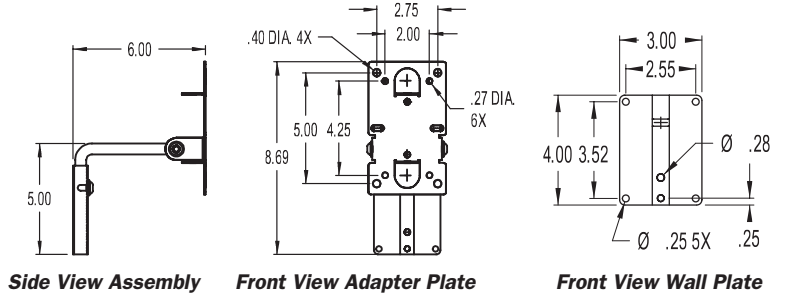


Side View Assembly

Front View Adapter Plate

Front View Wall Plate

HORIZONTAL ORIENTATION:

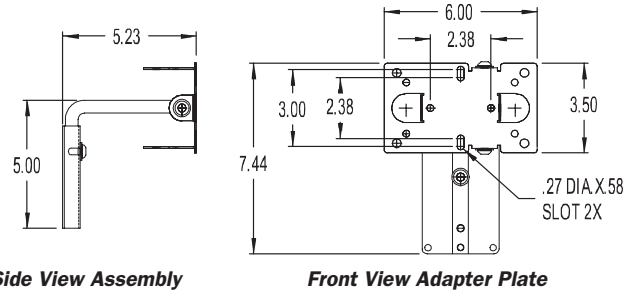

Side View Assembly

Front View Adapter Plate

www.allenproducts.com

WARNING: Mounting and/or suspension of audio and video equipment requires experienced professionals. Improperly installed equipment can result in property damage, personal injury and/or liability to the installing contractor.

MADE IN THE USA

ALWAYS USE SAFETY CABLES.



A division of:
ADAPTIVE TECHNOLOGIES GROUP
 1635 E. Burnett Street
 Signal Hill, CA 90755 USA
 PH: 562.424.1100 FX: 562.424.3520