


SIXBAR 1000 IP™

SKU# SIX098



Photometric Data

Specifications are subject to change without any prior written notice.

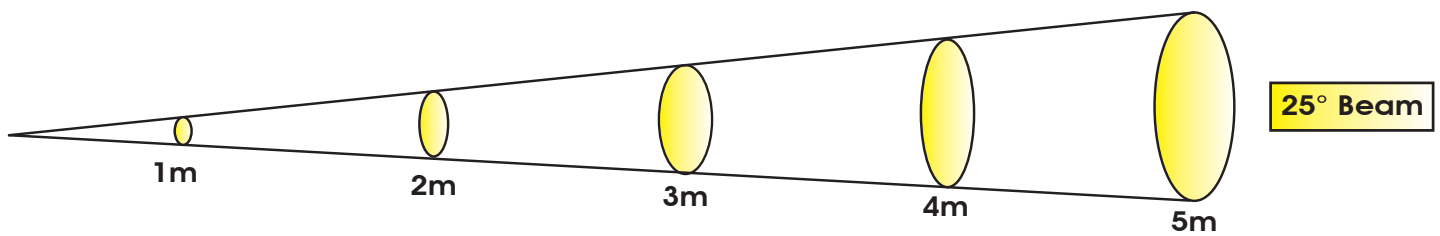

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
25° Beam Diameter	0.45	1.5	0.88	2.9	1.33	4.4	1.77	5.8	2.21	7.3
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
RED LEDs	1,253	116	542	50	283	26	172	16	119	11
GREEN LEDs	3,267	304	1,416	132	726	67	429	40	275	26
BLUE LEDs	469	44	211	20	108	10	65	6	45	4
WHITE LEDs	2,813	261	1,216	113	621	58	372	35	242	22
AMBER LEDs	1,286	119	532	49	271	25	153	14	101	9
UV LEDs	50	5	24	2	13	1	10	1	7	1
FULL ON	7,149	664	2,910	270	1,481	138	880	82	603	56

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu


SIXBAR 1000 IP™

SKU# SIX098



Photometric Data - 35° Diffusion Lens Filter

Specifications are subject to change without any prior written notice.

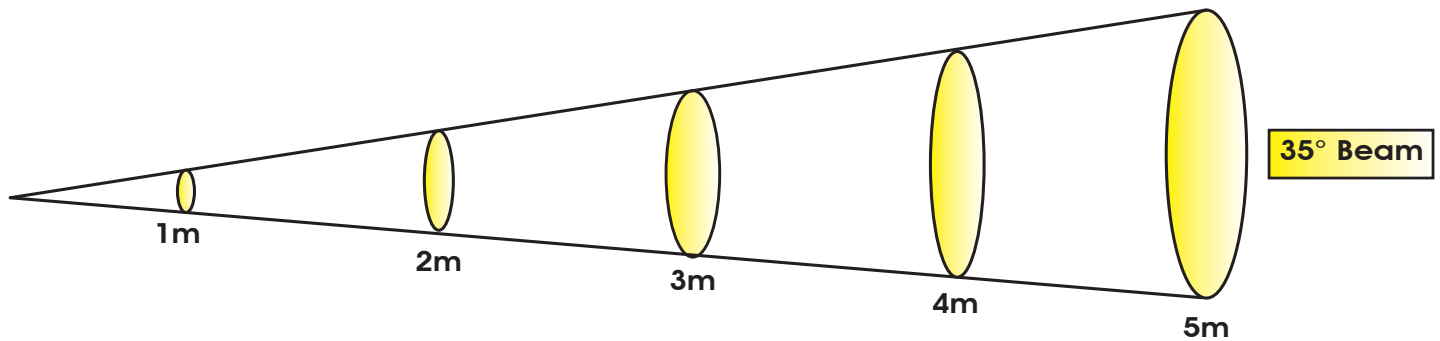

DIFFUSION FILTER

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
35° Beam Diameter	0.63	2.1	1.27	4.2	1.9	6.2	2.52	8.3	3.16	10.4
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
RED LEDs	1,157	107	503	47	260	24	161	15	109	10
GREEN LEDs	2,492	232	1,041	97	528	49	316	29	211	20
BLUE LEDs	477	44	202	19	103	10	65	6	45	4
WHITE LEDs	2,701	251	1,135	105	576	54	346	32	231	21
AMBER LEDs	1,199	111	510	47	259	24	155	14	104	10
UV LEDs	75	7	36	3	22	2	16	1	13	1
FULL ON	6,413	596	2,608	242	1,287	120	767	71	508	47

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu


SIXBAR 1000 IP™

SKU# SIX098



Photometric Data - 45° Frost Lens Filter

Specifications are subject to change without any prior written notice.

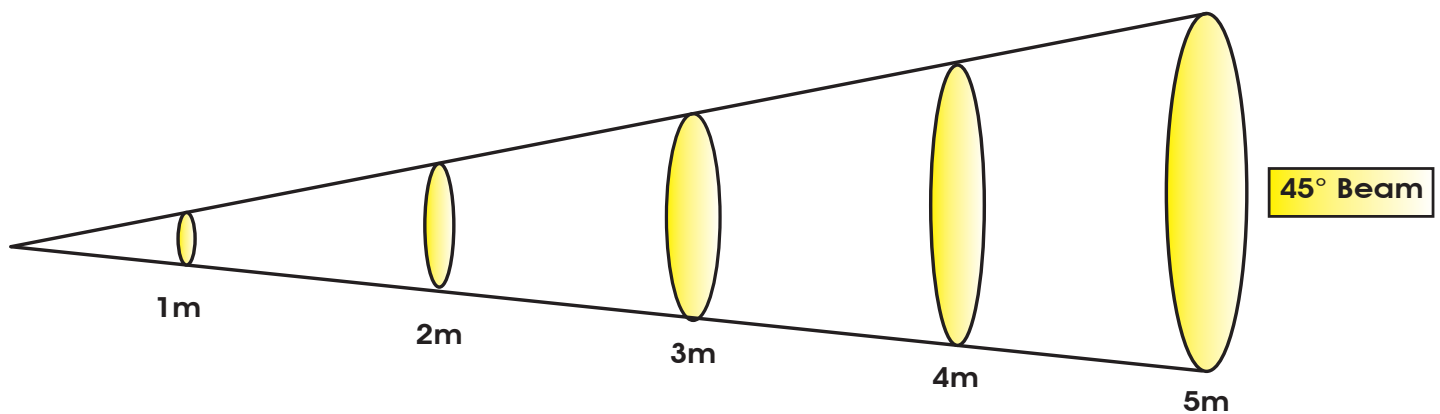

FROST FILTER

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
45° Beam Diameter	0.83	2.7	1.66	5.4	2.49	8.2	3.31	10.9	4.14	13.6
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
RED LEDs	689	64	258	24	127	12	79	7	52	5
GREEN LEDs	2,015	187	722	67	358	33	222	21	147	14
BLUE LEDs	358	33	126	12	66	6	41	4	28	3
WHITE LEDs	1,809	168	631	59	313	29	196	18	129	12
AMBER LEDs	858	80	314	29	150	14	98	9	65	6
UV LEDs	47	4	21	2	12	1	8	1	7	1
FULL ON	4,377	407	1,563	145	760	71	465	43	307	29

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu