

Smart Videohub 20x20



Smart Videohub 20x20 is a larger advanced Ultra HD mixed format router with built in control panel and monitoring. Ideal for larger workgroups and mobile broadcasting, it includes advanced 6G-SDI connections so you can simultaneously connect and route any combination of SD, HD and Ultra HD video all on the same router at the same time. You also get revolutionary new visual routing with the unique spin knob control, push button panel and the built in LCD screen. Also includes Ethernet for remote control and a fully customizable software development kit for Mac and Windows.

\$1,995

Connections

SDI Video Inputs

20 x 10 bit SD-SDI, HD-SDI and 6G-SDI.

SDI Video Outputs

20 x 10 bit SD-SDI, HD-SDI and 6G-SDI.

SDI Rates

DVB-ASI, 270Mb, 1.5G, 3G, 6G.

Video Input Re-Sync

None.

SDI Reclocking

On all SDI outputs

Reference Input

Tri-Sync or Black Burst.

Control Panel Connection

Ethernet.

Serial Control Connection

RJ-7 RS-422.

Multi Rate Support

Auto detection of SD, HD or 6G-SDI. Simultaneous routing of 4K, HD, SD video and DVB-ASI.

Updates

USB.

Router Control


21 buttons for local control of Videohub. 6 buttons and scroll wheel for control of LCD display or RJ45 Ethernet.

Router Configuration

Via front panel LCD or use either RJ45 Ethernet or USB 2.0 for setting IP address only.

RS-422 Router Control

1 x input for controlling router crosspoint switching.

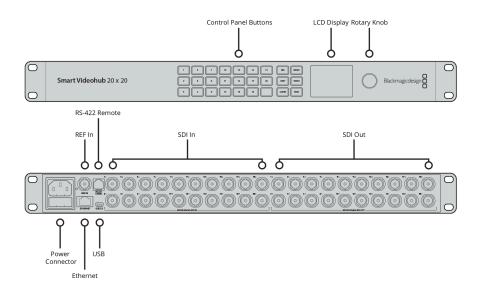

Standards

SD Video Standards

525i59.94 NTSC, 625i50 PAL

HD Video Standards

720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60

2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p, 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30

4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p

SDI Compliance

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M Level A and B, ITU-R BT.656 and ITU-R BT.601.

SDI Video Sampling

4:2:2 and 4:4:4

SDI Audio Sampling

Television standard sample rate of 48kHz and 24 bit.

SDI Color Precision

4:2:2 and 4:4:4 10 bit.

SDI Color Space

YUV or RGB.

SDI Auto Switching

Automatically selects between SD-SDI, HD-SDI, 6G-SDI and DVB-ASI on each input so that each input can be running a different television standard.

SDI Metadata Support

Video payload identification ancillary data as per SMPTE 352M.

Control

Built in Control Panel

20 buttons for local control of Videohub with 6 buttons and scroll wheel for menu control. 2.2 inch color display.

External Control Panel

Includes Blackmagic Videohub software control panel for Mac and Windows. Supports Blackmagic Smart Control and Blackmagic Master Control hardware panels. Includes Blackmagic Videohub SDK and Ethernet Videohub Control Protocol.

Display

Built in LCD for video and menu settings.

Operating Systems



Mac 10.12 Sierra, Mac 10.13 High Sierra or later.



Windows 8.1 or Windows 10.

Software

Software Control

Router control included free for WindowsTM and Mac TM .

Internal Software Upgrade

Via included updater application.

Power Requirements

Power Supply

1 x Internal 90 - 240V AC. IEC power cable required.

Power Fail Protection

Router connections preserved and restored instantly at power on.

Power Consumption

34 Watts

Physical Specifications



Physical Installation

1 rack unit size. Less than 6 inches deep.

Environmental Specifications

Operating temperature: 0° to 40° C (32° to 104° F)

Storage temperature: -20° to 45° C (-4° to 113° F) Relative Humidity: 0% to 90% non-condensing

What's Included

Smart Videohub 20x20

SD card with software and manual

All items on this website are copyright Blackmagic Design Pty. Ltd. 2019, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. Privacy Policy	
Blackmagic Design Authorized Reseller	

3 Year Limited Manufacturer's Warranty, and 12 Month Warranty on the front panel.

Warranty