

C5/BU/CK1/S/VC

SAPLING® CLOCK BAFFLE

8" O.D. speaker, 5W-25/70V transformer, Volume Control



GENERAL DESCRIPTION

The C5/BU/CK1/S/VC is a complete loudspeaker assembly that is compatible with Sapling analog clocks. The assembly consists of an 8C5PAX - 8" O.D. loudspeaker with a 5 oz. magnet, a TBLU - 5W-25/70V transformer, with a screwdriver or knob adjusted (knob is included) volume control. Clock assembly is NOT supplied.

INTENDED USE - Indoor Environment

Program Material	Signal Tones, Voice, and Music
Installation	Loudspeaker may be oriented above, below, left or right of the clock.

AUDIO SPECIFICATIONS



Average Sensitivity	92 dB SPL, 1W/ 1M
Loudspeaker Power Rating	12W RMS, EIA 426A Standard
Maximum Power Rating	15W @ 8 Ohms
Calculated Output	99dB SPL, 5W/ 1M
Magnet Type & Weight	BeFe Ceramic, 10 oz. Nominal
Frequency Response	65Hz - 17 kHz EIA 426A Standard
Nominal Coverage Angle	90° Included Angle, -6 dB / 2 kHz, Half space
Audio Connection	7" color-coded pigtails, pre-cut
Wattage Taps	0.32W, 0.63W, 1.25W, 2.5W, 5W

SYSTEM COMPONENTS

Loudspeaker	8C5PAX
Transformer	25/70V 5W-5 tap Color Coded Leads (5W, 2.5W, 1.25W, 0.63W, 0.31W)

RECOMMENDED QUAM COMPONENTS

Surface Mount Enclosure	SE9W
Recessed Mount Enclosure	ES8-CK

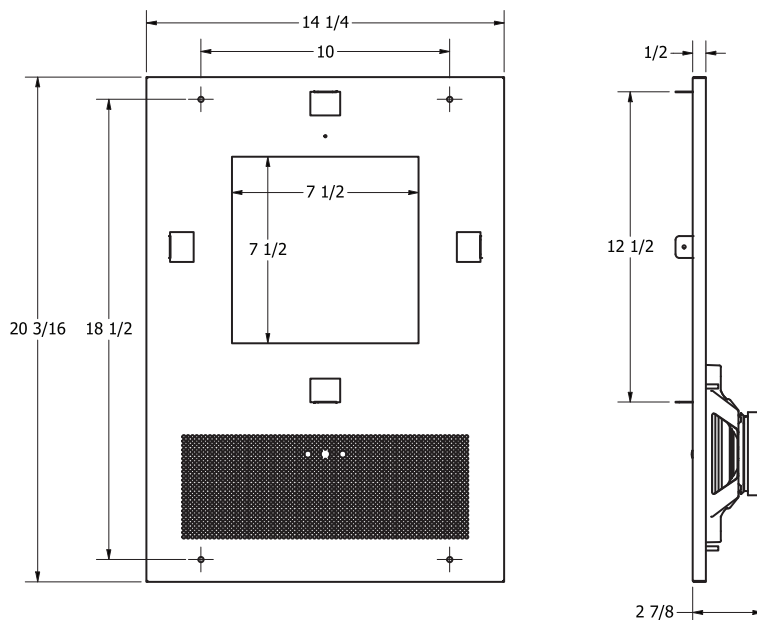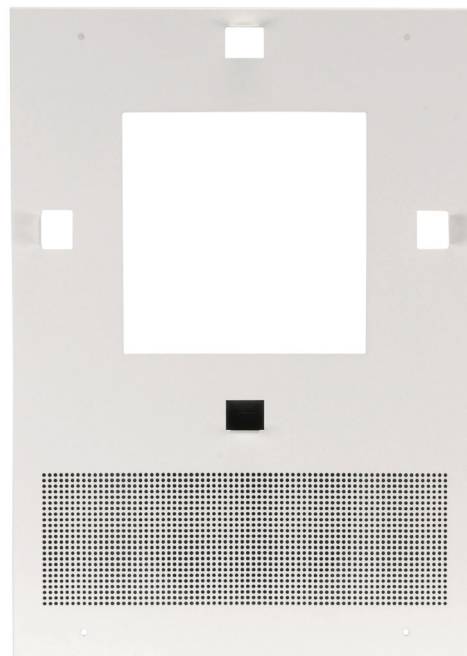

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the Specs and Diagrams section at: www.QuamSpeakers.com



QUAM NICHOLS COMPANY, INC.
 234 East Marquette Road. Chicago, IL. 60637
 t: 1-800-NEED-NOW (800-633-3669)
 f: 1-888-NEED-NOW (888-633-3669)
 e: NeedNow@QNC.com
www.QuamSpeakers.com

©2019 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.