



Quam

VANDAL RESISTANT

CIS8/25

INTERCOM ASSEMBLY

2-Gang Hands-Free Station, 1W-25V, 3-Tap Transformer, Vandal Resistant, Stainless Steel, NO Button

GENERAL DESCRIPTION

The **CIS8/25** is a 2-gang, vandal resistant "hands free - no call button" station with a 2.5" square frame loudspeaker, 2.35-oz. ceramic magnet and a moisture-resistant cone - and a 1W-25V transformer. Three (3) interwoven, steel security screens are mounted between the faceplate and loudspeaker. Tamper-resistant, 6-32 x 1" Pin In Torx® hardware included.

INTENDED USE - Indoor or Protected Outdoor Environment


Program Material | Signal Tones and Voice

AUDIO SPECIFICATIONS

| | |
|------------------------|---|
| Average Sensitivity | 87 dB SPL, 1W/ 1M |
| Magnet Type & Weight | BeFe Ceramic, 2.35 oz. Nominal |
| Frequency Response | 200 Hz - 8 kHz EIA 426A Standard |
| Nominal Coverage Angle | 90° Included Angle, -6 dB / 2 kHz, Half space |
| Audio Connection | 7" Color-Coded, Stripped and Tinned Leads |

RECOMMENDED QUAM COMPONENTS

Enclosures | Surface Mount : SE6GVP, SE7GVP

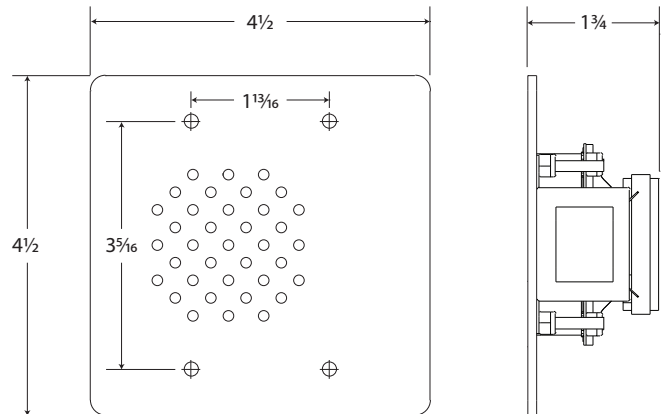

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the Specs and Diagrams section at: www.QuamSpeakers.com



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Road. Chicago, IL. 60637
t: 1-800-NEED-NOW (800-633-3669)
f: 1-888-NEED-NOW (888-633-3669)
e: NeedNow@QNC.com
www.QuamSpeakers.com

©2017 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.