

VM-4HDMI

1:4 HDMI Distribution Amplifier

NEW


DISTRIBUTION AMPLIFIERS



The **VM-4HDMI** is a distribution amplifier for HDMI signals. It reclocks and equalizes the signal and distributes it to four identical outputs.

FEATURES

- **MaxData Rate** - 1.65Gbps.
- **HDCP Compliant**
- **Enhanced EDID (Extended Display Identification Data)** - The unit can store and recall a default EDID setting in non-volatile memory from the output allowing convenient and reliable connection to the source.
- **Active Input & Output LED Indicators**
- **Worldwide Power Supply** - 100-264V AC
- **Standard 19" Rack Mount Size** - 1U

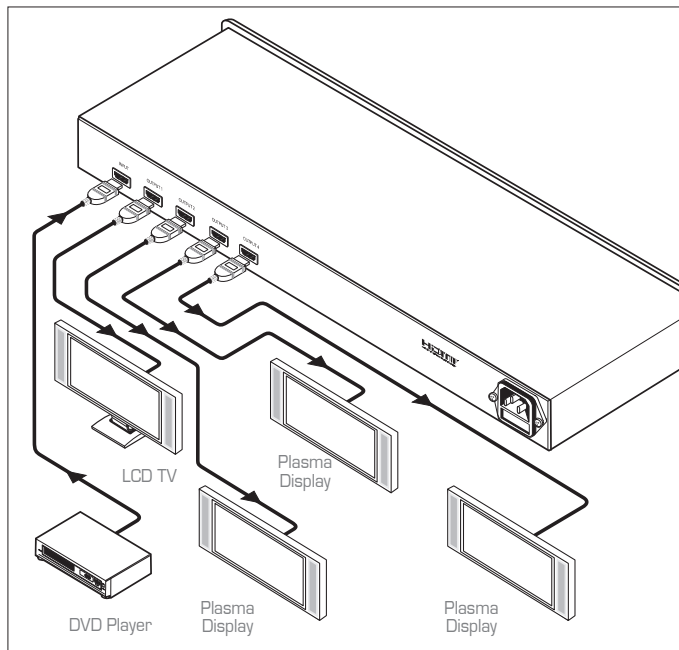

TECHNICAL SPECIFICATIONS

INPUT:	HDMI Connector
OUTPUTS:	4 HDMI Connectors
BANDWIDTH (-3dB):	Supports up to 1.65Gbps bandwidth per graphic channel
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI 1.0 and HDCP
CONTROLS:	SELECT and READ buttons for selecting and storing EDID information
INDICATOR LEDs:	OUTPUTS 1 to 4, and ACTIVE LED
POWER SOURCE:	100-264 VAC
DIMENSIONS:	19-inch (W), 7-inch (D), 1U (H)
WEIGHT:	2.5 kg. (5.5 lbs.) approx.
ACCESSORIES:	Power cord 1 HDMI/HDMI male-to-male cable
OPTIONS:	HDMI/HDMI male-to-male cables

