

SPECIFICATION SHEET



Active High Speed HDMI Cable

- CL3 Rated Jacket for in wall installations
- Supports resolutions up to 1080p @ 60Hz
- Supports High speed HDMI features such as:
 - DTS-HD 7.1
 - Dolby 7.1
 - 3D
 - CEC
 - HDCP
 - Deep Color
- Lifetime Warranty

Specifications: Active High Speed HDMI Cable

Electrical Specifications:

Signal Bandwidth:	3.4Gbps
Nominal Impedance with Tolerance:	100 pF/m 10 Ω
Nominal Capacitance:	<700PF
Insulation Resistance:	100mega ohms/KM at 20 °C
Nominal Attenuation:	1-1000 MHz dB/50ft & dB/150ft (dB/15m & dB/45m)
Voltage Rating	30V
Power Consumption:	50mA @ 5V

Physical Specifications:

Cable Bend Radius:	10mm
Operating Temperature:	-20 °C to +85 °C
Storage Temperature:	-25 °C to +85 °C
Relative Humidity:	60 ~ 93%
Approvals:	CL3 RoHS CE
Warranty:	3 Years
Package Type:	Poly Bag

Conductor:

Conductor type:	24AWG (7/0.20 TC)
Drain Wire:	24AWG (7/0.20 TC)


Connector (2):

Connector Type :	19 Pin HDMI Male
Housing:	Black
Plating:	Gold Flashed
Chip:	Redmere (1692 FW Rev0.2)

Overall Cable Construction:


Braided Shield:	Aluminum magnesium Braid 16/10/0.12 (65% Coverage)
Foil Shield:	Aluminum Wrap (100% Coverage)
Drain Wire:	24AWG (7/0.20 BC)
Jacket:	Black PVC CL3 O.D. (10.5mm ± 0.2)

Specifications: Active High Speed HDMI Cable

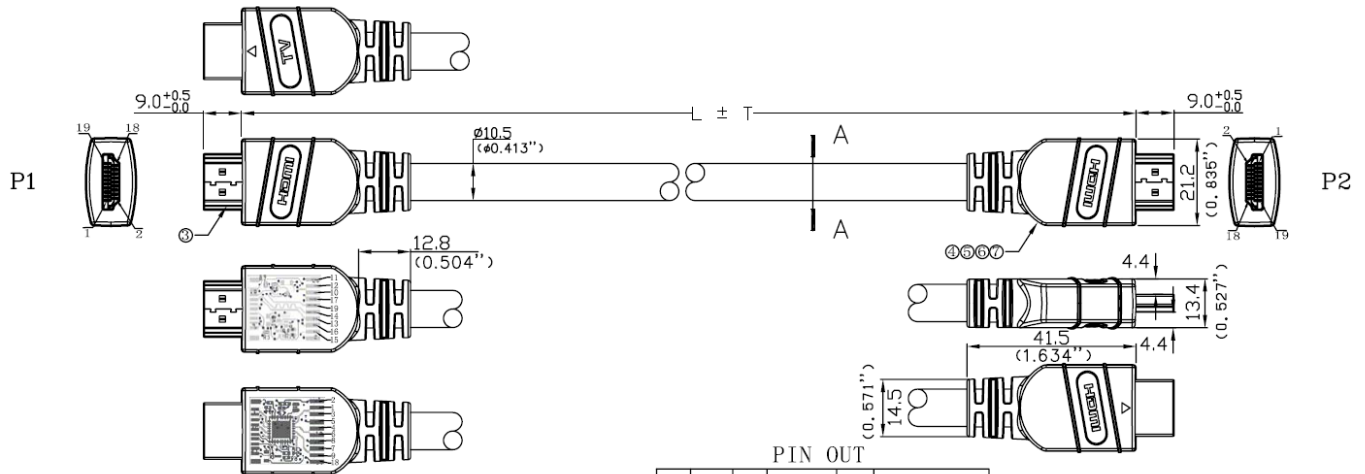

PIN OUT

P1	PCBA (1892)	PCBA PIN	Wire Color	P2	SIGNAL NAME
1		1	Red	1	TMDS Data2+
3		3	White	3	TMDS Data2-
2		2	Drain	2	TMDS Data2 Shield
4		4	Brown	4	TMDS Data1+
6		6	White	6	TMDS Data1-
5		5	Drain	5	TMDS Data1 Shield
7		7	Blue	7	TMDS Data0+
9		9	White	9	TMDS Data0-
8		8	Drain	8	TMDS Data0 Shield
10		10	Green	10	TMDS Clock+
12		12	White	12	TMDS Clock-
11		11	Drain	11	TMDS Clock- Shield
13		13	Red	13	CEC
14		14	Black	14	UTILITY
19		19	White	19	Hot Plug Detect
17		17	Drain	17	DDC/CED Ground
15		15	Yellow	15	SCL
16		16	Violet	16	SDA
18		18	White	18	+5V Power
Shell		Shell	Drain	Shell	

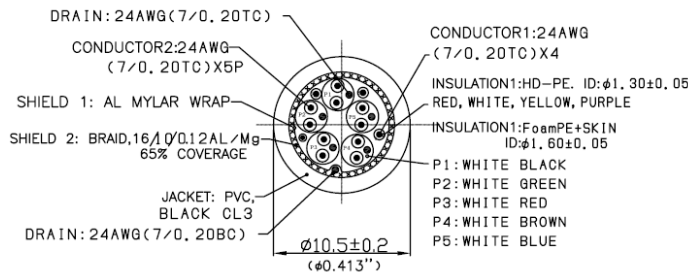

Part Number	Description	Weight (lbs)
41369	100ft Active High Speed HDMI Cable	8.07



CABLES TO GO

Cables To Go
 3555 Kettering Blvd.
 Moraine, OH 45439
 Phone: 800.287.2843
 www.c2g.com

Follow Us

