




# Quam

## 12C10PAX 12" Loudspeaker

### 0203- PUBLIC ADDRESS LOUDSPEAKERS, INDIVIDUAL

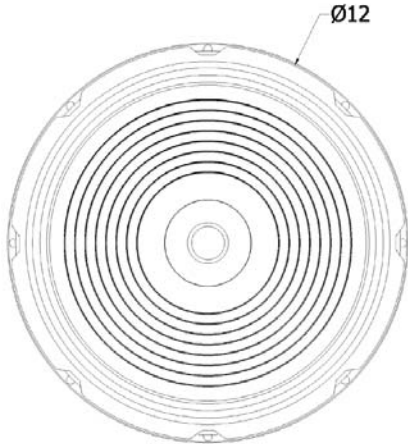

#### GENERAL DESCRIPTION

The Quam 12C10PAX is a 12" frame, 8 Ohm loudspeaker with concentric mount hard fiber HF cone. Finish: Black baked epoxy hybrid.

#### INTENDED USE

Wide frequency response replacement loudspeaker; indoor environment.

Program Material: Signal tones, voice and music

#### SYSTEM COMPONENTS

N/A

#### RECOMMENDED ADDITIONAL QUAM COMPONENTS

0502- Transformers

#### AUDIO SPECIFICATIONS

Speaker Size	12" frame
Average Sensitivity	96 dB SPL, 1W/ 1M
Loudspeaker Power Rating	20W RMS, EIA 426A Standard
Calculated Output	109 dB SPL, 20W/ 1M
Magnet Type, Weight	BeFe Ceramic, 10 oz. Nominal
Frequency Response	50Hz - 14 kHz EIA 462A Standard
Nominal Coverage Angle	100° Included angle, -6 dB / 2 kHz, Half space
Mounting	8x 1/4 x 3/8" oval holes spaced 45° apart 11-5/8' circle
Audio Connection:	0.205" spade lug

Recommended construction sequences, installation instructions and A&E Specifications are available in various formats on the Quam Architects' and Engineers' Resources CD or on the web at: [www.quamspeakers.com](http://www.quamspeakers.com)

**02**  
**LOUDSPEAKERS, INDIVIDUAL**

#### Quam-Nichols Company

234 East Marquette Road, Chicago, IL 60637  
Phone: (800) NEED NOW Fax: (888) NEED NOW  
(800) 633 - 3669 (888) 633 - 3669  
E-Mail: [neednow@qnc.com](mailto:neednow@qnc.com) [www.quamspeakers.com](http://www.quamspeakers.com)

