


## Detailed Specification & Technical Data

4 Pair 23 AWG UTP Category 6 CMR  
10/100/1000 Base-T Ethernet, IP CCTV, Digital Integration, HD Base-T



**4246**

### Construction & Dimensions

CONDUCTOR PARAMETERS		-
Number Of Pairs		4
AWG Size		23
Conductor Stranding		Solid
Conductor Type		Bare Copper
Nominal DCR		24 $\Omega$ /1000 ft
INSULATION PARAMETERS		-
Insulation Type		Polyolefin
Insulation Color Code		1. Blue, WH-Blue 2. Orange, WH-Orange 3. Green, WH-Green 4. Brown, WH-Brown
SHIELDING PARAMETERS		-
Shield Type		Unshielded Twisted Pair (UTP)
ELECTRICAL CHARACTERISTICS		-
Nominal Impedance		100 $\Omega$
Nominal Capacitance Between Conductors		15 pF/ft


### Overall Construction

OVERALL CONSTRUCTION PARAMETERS	
Total Number of Conductors	8
Jacket Type	PVC
Nominal Cable O.D.	0.22 in
Plenum	No
NEC UL Rating	CMR
RoHS Compliant	Yes
ANSI/TIA Category	Category 6 TIA/EIA 568C.2
TIA Test	ANSI/TIA-568-C.2
Pull Tension	40 lbs
Bend Radius	1.1 in
Cable Weight	29 lbs

### Overall Electrical & Optical Characteristics

OVERALL ELECTRICAL/OPTICAL CHARACTERISTICS	
Nominal Velocity of Propagation (VP)	72%
Delay Skew	45 ns/100 m
UL Flammability	UL1666 Vertical Shaft
CSA Flammability	FT4
Operating Range	0 to 75°C
UL Voltage Rating	300

## Detailed Specification & Technical Data

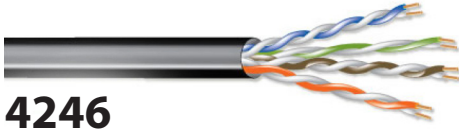

**4246**

Frequency (Mhz)	Max. Insertion Loss	Min. NEXT	Min. NEXT	Max/Min Fitted Imp.	Min. ACR	Min. PSACRF (PSELF-EXT)	Min. ACRF (ELF-EXT)	Min. RL (Return Loss)	Max/Min Input Imp. Unfit	Max/Min Fitted Imp.
1 MHz	2 db/100 m	75.3 dB	73.3 dB	71.3 dB	73.3 dB	67.8 dB	70.8 dB	20 dB	100 ± 15 Ω	100 ± 15 Ω
4 MHz	3.7 db/100 m	66.3 dB	64.3 dB	60.6 dB	62.6 dB	55.8 dB	58.8 dB	23 dB	100 ± 15 Ω	100 ± 15 Ω
8 MHz	5.2 db/100 m	63.3 dB	61.3 dB	56.1 dB	58.1 dB	49.7 dB	52.7 dB	24.5 dB	100 ± 15 Ω	100 ± 15 Ω
10 MHz	5.8 db/100 m	61.8 dB	59.8 dB	54 dB	56 dB	47.8 dB	50.8 dB	25 dB	100 ± 15 Ω	100 ± 15 Ω
16 MHz	7.4 db/100 m	58.6 dB	56.6 dB	49.2 dB	51.2 dB	43.7 dB	46.7 dB	25 dB	100 ± 15 Ω	100 ± 15 Ω
20 MHz	8.3 db/100 m	57.1 dB	55.1 dB	46.8 dB	46.8 dB	41.8 dB	44.8 dB	25 dB	100 ± 15 Ω	100 ± 15 Ω
25 MHz	9.3 db/100 m	55.5 dB	53.5 dB	44.3 dB	46.3 dB	39.8 dB	42.8 dB	24.3 dB	100 ± 15 Ω	100 ± 15 Ω
31.25 MHz	11.4 db/100 m	54 dB	52 dB	41.6 dB	43.6 dB	37.9 dB	40.9 dB	23.6 dB	100 ± 15 Ω	100 ± 15 Ω
62.5 MHz	15 db/100 m	49.1 dB	47.1 dB	32.1 dB	34.1 dB	31.9 dB	34.9 dB	21.5 dB	100 ± 15 Ω	100 ± 15 Ω
100 MHz	19.3 db/100 m	45.8 dB	43.8 dB	24.5 dB	26.5 dB	27.8 dB	30.8 dB	20.8 dB	100 ± 15 Ω	100 ± 15 Ω
155 MHz	24.5 db/100 m	42.7 dB	40.7 dB	16.2 dB	18.2 dB	24 dB	27 dB	19.8 dB	100 ± 15 Ω	100 ± 15 Ω
200 MHz	28.3 db/100 m	40.9 dB	38.9 dB	10.6 dB	12.6 dB	21.8 dB	24.8 dB	18.7 dB	100 ± 22 Ω	100 ± 15 Ω
250 MHz	32.1 db/100 m	39.3 dB	37.3 dB	5.2 dB	7.2 dB	19.8 dB	22.8 dB	18 dB	100 ± 32 Ω	100 ± 15 Ω
300 MHz	38 db/100 m	38.1 dB	36.1 dB	-0.5 dB	2.5 dB	18.3 dB	21.3 dB	17.5 dB	100 ± 32 Ω	100 ± 15 Ω
350 MHz	38.9 db/100 m	37.1 dB	35.1 dB	-3.7 dB	-1.7 dB	16.9 dB	19.9 dB	17 dB	100 ± 32 Ω	100 ± 15 Ω
400 MHz	42 db/100 m	36.3 dB	34.3 dB	-7.7 dB	-5.7 dB	15.8 dB	18.8 dB	16.6 dB	100 ± 32 Ω	100 ± 15 Ω
450 MHz	45 db/100 m	35.5 dB	33.5 dB	-11.5 dB	-9.5 dB	14.7 dB	17.7 dB	16.2 dB	100 ± 32 Ω	100 ± 15 Ω
500 MHz	47.9 db/100 m	34.8 dB	32.8 dB	-15 dB	-13 dB	13.8 dB	16.8 dB	15.9 dB	100 ± 32 Ω	100 ± 15 Ω
550 MHz	50.6 db/100 m	34.2 dB	32.2 dB	-18.4 dB	-16.4 dB	13 dB	16 dB	15.6 dB	100 ± 32 Ω	100 ± 15 Ω

Tested to 550 MHz - Values above 250 MHz are for Engineering Purposes Only

### Related Products

RELATED PRODUCTS	
Plenum Number	254246
Indoor/Outdoor Non Aquaseal	4246IO
Outdoor Direct Burial 1	4246OSP
Jack	KJ458MT-C6C-XX
Modular Plug	32-6EZP
Modular Plug 2	32-6198UL